

LED Indicating Lamps for Panel Mounting

Series 8013

PanSiG



www.stahl.de



04788E00

- > For panel mounting
- > With integrated LED
 - High luminance
 - Low heat built-up
 - Prolonged service life
- > Colours:
 - red, yellow, green, blue, white
- > Connection by means of spring clamp terminals or plug-in connection with connection line
 - with terminal compartment
 - without terminal compartment

E4



The LED diode indicating lamps of the Series 8013 signal command modes in load, control and signal circuits by lighting up or going out. They are designed for single-hole fixing D 30 according to EN 50007 in combination with indicating lamp inserts in Series 8602. The version 8013/..1 is a complete, certified explosion-protected device suitable for the installation in enclosure walls or covers of electric devices, switch panels or control desks. The versions 8013/..2 are incomplete, explosion-protected devices suitable for the installation in enclosures of the protection type "Increased safety" according to IEC/EN 60079-7. The LED diode indicating lamps Series 8013/..2. are used in intrinsically safe circuits.

	ATEX / IECEx / GOST					
Zone	0	1	2	20	21	22
Ex e / Ex i with connection chamber: For use in		x	x		x	x
Ex e / Ex i without connection chamber: For use in		x	x			

Zone	NEC 505			NEC 506			Division	NEC 500					
	Class I							Class I		Class II		Class III	
	0	1	2	20	21	22		1	2	1	2	1	2
Ex e: For use in		x	x				Ex e: For use in		x				
Ex i: For use in	x	x	x				Ex i: For use in	x	x				



WebCode 8013A

LED Indicating Lamps for Panel Mounting

Series 8013



Selection table

Version	Description	Order number	Weight kg
 8013/3.1 with terminal compartment <small>01712E00</small>	Connection: spring clamp terminal Ex dem Ex i	8013/311-al	0.130
		8013/321-al	0.140
 8013/3.2 without terminal compartment <small>04787E00</small>	Connection: spring clamp terminal Ex dem Ex i	8013/312-al	0.100
		8013/322-al	0.110
Note	The coloured caps red, yellow, green, blue, white are enclosed in the delivery. Diode indicating lamp with installed connecting cable on request		






Explosion Protection

Explosion protection

Global (IECEX)
Gas and dust

8013/3.1	IECEX PTB 07.0010 X
8013/3.2	IECEX PTB 07.0012 U
8013/3.3	IECEX PTB 07.0010 X
Ex e	8013/311 Ex dem IIC T6 8013/312 Ex dem IIC 8013/313 Ex dem IIC T6
Ex i	8013/321 Ex dm ia IIC T6 8013/322 Ex dm ia IIC 8013/323 Ex dm ia IIC T6
8013/3.1 8013/3.3	Ex tD A21 IP65 T80°C

Europe (ATEX)
Gas and dust

8013/3.1	PTB 02 ATEX 2131 X
8013/3.2	PTB 02 ATEX 2130 U
Ex e	8013/311  II 2 G Ex de mb IIC T6 8013/312  II 2 G Ex de mb IIC
Ex i	8013/321  II 2 G Ex d mb ia IIC T6 8013/322  II 2 G Ex d mb ia IIC
8013/3.1 8013/3.3	 II 2 D Ex tD A21 IP65 T80°C

Certificates

Certificates

IECEX, ATEX, India (PESO), Canada (CSA), Kazakhstan (GOST-K), Russia (GOST-R), Ukraine (TR), USA (CSA, UL), Belarus (operating authorisation)

Technical Data

Electrical data

Rated operational voltage	Ex e 12 (- 10%) ... 254 (+ 6%) V AC / DC Ex i 10.8 ... 28 V DC
Rated operational current	0.014 A at 24 V DC
Frequency	0 ... 60 Hz
Rated operational power	0.6 W
Electrical life	10 ⁵ operating hours
Safety-specific maximum values (Ex i)	Additional electrical data for intrinsically safe version Type 8013/3.2 U _i ≤ 28 V, I _i ≤ 150 mA, P _i = 1 W, inductance L _i and capacity C _i negligible
Recommended binary output	STAHL 9175/10-16-11 one duct STAHL 9175/20-16-11 two ducts
Recommended safety barrier	STAHL 9001/01-280-110-101

Ambient conditions

Ambient temperature -30 ... + 55 °C

LED Indicating Lamps for Panel Mounting

Series 8013

PanSiG



Technical Data





Mechanical data

Degree of protection	according to IEC/EN 60529 8013/3.1 IP65 (front side IP66) 8013/3.2 IP65 (front side IP66, connections IP20)
Material	
Enclosure	Polyamide
Calottes	Polyamide
Insert caps	Polyamide
Indicating lamp	
Lamps	LED white
Colours	red, yellow, green, blue, white, by means of coloured calotte insert caps

Mounting / installation

Cable entry	8013/3.1 M16 x 1,5 (∅ 4 ... 9 mm) 8013/3.2
Connection type	Connection cross-section: 8013/3.1 0.75 ... 1.5 mm ² 8013/3.2 0.50 ... 2.5 mm ²

Accessories and spare parts


Designation	Figure	Description	Art. no.	Weight kg
Additional front label	 05543E00	Label mount, size 1, without symbol label Text: 1 line	155632	0.001
		Label mount, size 2, without symbol label Text: 1 or 2 lines	155687	0.002
		Label mount, size 3, without symbol label Text: 1, 2 or 3 lines	155844	0.002
		for actuators to fit ∅ 30.5 mm holes		0.000
		Symbol labels: without text with text; please specify text: HAND - 0 - AUTO I - 0 - II OFF - • - ON 0 - I - II 0 - I 0 - Betrieb - I I - II 0 - • - I		
Calotte	 05038E00	round, ∅ 30.5 mm, with transparent lens	155759	0.008
Insert cap		red	155842	0.003
		yellow	155834	0.003
		green	155852	0.003
		blue	155860	0.003
		white	155824	0.003
		all colours	155447	0.003
Closing part	 05647E00	for closing of unused mounting holes ∅ 30.5 mm	155329	0.016

E4

LED Indicating Lamps for Panel Mounting Series 8013




Dimensional Drawings (All Dimensions in mm) - Subject to Alterations

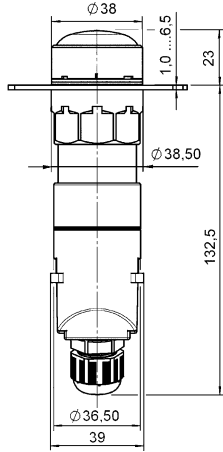


8013/3.1
Indicating lamp with
terminal compartment

03314E00



8013/3.2
Indicating lamp without
terminal compartment

04825E00



04488E00

Drilling pattern:
for aligning several
devices
diameter 38 mm, in a panel

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.